

Sniffer (Bluetooth) (0492)

Sniffer (Bluetooth) for LogiCO2 Safety Systems.




TECHNICAL DATA

Power supply: 24V DC, from the alarm system
Ambient temperature: 0 to +40°C (+32°F to +102°F)
Dimensions (LxWxD): 90 x 161 x 38 mm /
3.5" x 6.3" x 1.5"

APP - SMARTPHONE

The LogiCO2-Sniffer App is available for both iOS and Android smartphones. Download from App Store or Google Play.

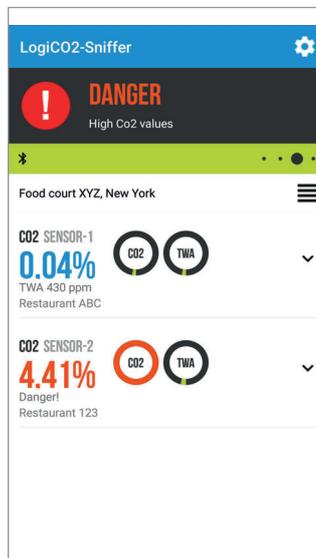

App available for free at:



FUNCTION

The LogiCO2-Sniffer (Bluetooth) is a gateway for reading out measuring values from LogiCO2 Safety Systems. It is only possible to read-out information from the Sniffer (read only). The measuring values are sent via Bluetooth to a smartphone with the free LogiCO2-Sniffer App installed. The Sniffer is connected to maximum eight sensors with or without a Central Unit. The Sniffer is monitoring the communication between the Sensor/s and the Central Unit. If no Central Unit is installed in the Safety System, the Sniffer can communicate directly with the Sensor/s.

The Bluetooth communication to smartphone is a "Broadcast Beacon". This means that no pairing between the Sniffer and the smartphone is necessary. All smartphones that have installed and is running the LogiCO2-Sniffer App will receive the measuring values from the Safety System, if they are in the transmission range of the Sniffer.

The Sniffer (Bluetooth) has a built-in 15 days logger memory. All measuring values are saved every 15 minutes in the logger memory.

The Sniffer is power supplied from the LogiCO2 Safety System. Default setting is to read-out one Sensor (ID-number 1) that is connected to a Central Unit.

MAINTANENCE

The LogiCO2-Sniffer (Bluetooth) requires no maintenance.

The App is used to read the current gas concentration values at the Sensor/s. A current Sensor alarm will be shown on the smartphone App.

ORDERING EXAMPLE

Item code	Description
0492	Sniffer for LogiCO2 Safety Systems.